



NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY




PEDIMAT INSERT STYLES

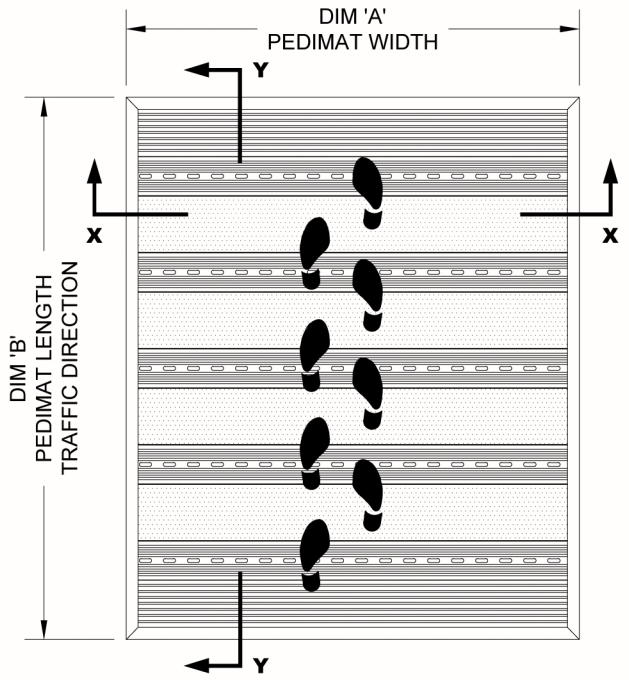

TYPICAL PLAN VIEW

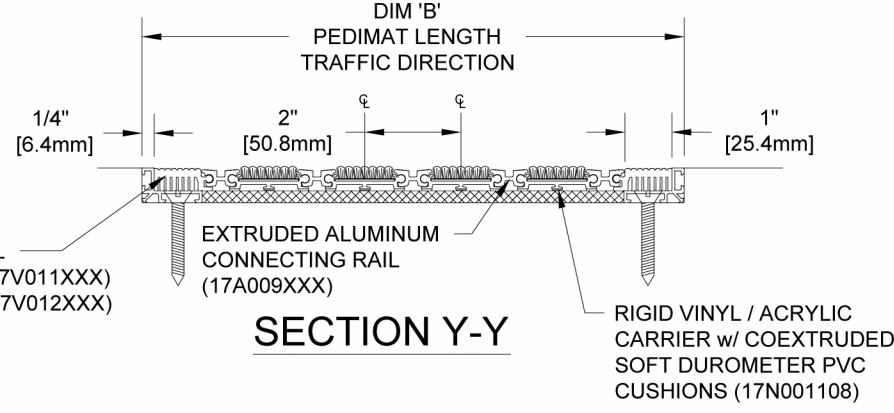

SECTION Y-Y

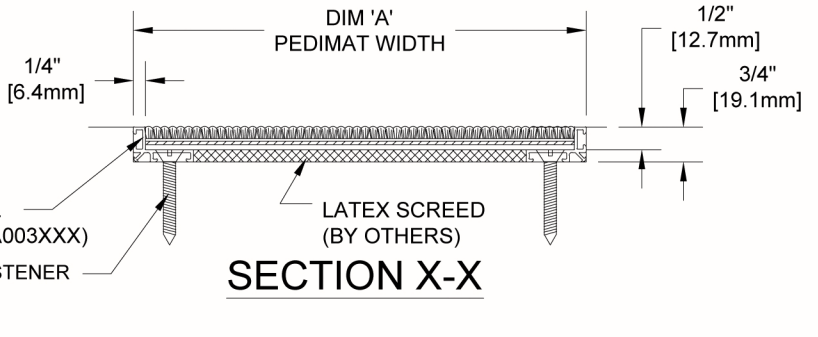

SECTION X-X

SQUARE END VINYL
 1" (25.4mm) WIDE (17V011XXX)
 2" (50.8mm) WIDE (17V012XXX)

ALUMINUM LEVEL
 BASE FRAME (17A003XXX)
 MASONRY LAG FASTENER
 (90H066004)
 24" (609.6mm) O.C

RIGID VINYL / ACRYLIC
 CARRIER w/ COEXTRUDED
 SOFT DUROMETER PVC
 CUSHIONS (17N001108)

LATEX SCREED
 (BY OTHERS)

NOTES:

*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER
 *PLEASE VERIFY TRAFFIC DIRECTION
 *PEDIMAT SHALL BE ABLE TO SUPPORT A 350 LB. ROLLING LOAD. LARGER LOADING MAY BE ACCOMODATED. CONTACT C/S SALES WITH SPECIFIC LOADING REQUIREMENTS.

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET
 *ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.



932 Hungerford Dr. #37B
 Rockville, MD 20850
 1-877-333-1018
www.eaglemat.com

QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.:

PLEASE VERIFY ALL